


MATERIAL	TESTA HEAD	Ø mm
B	1	0,74 1,40
B	2	0,74
B	3	0,74 1,22
B	4	0,74 1,02
B	5	1,22
B	6	0,74
B	7	0,53
B	8	1,22
S	9	0,74
B	10	2,00
B	11	1,22
S	15	0,74
B	21	0,74 1,02 1,22

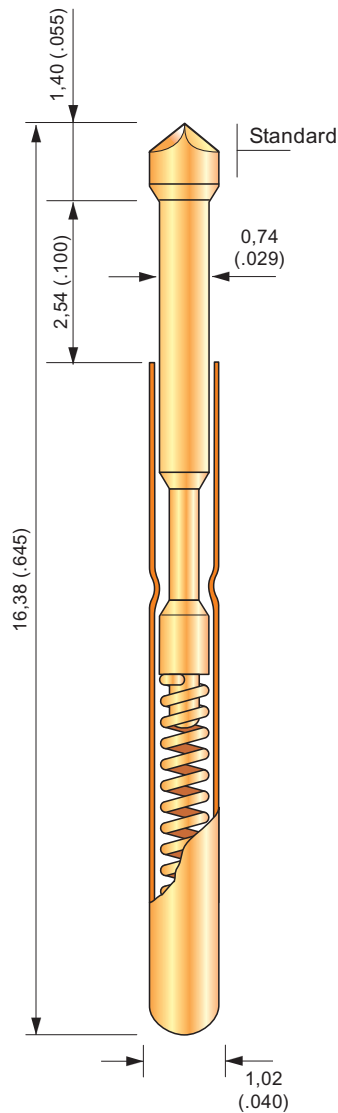

**Dati Tecnici**

Distanza minima raccomandata : 1,91 mm  
 Intensità nominale : 3,0 A  
 Resistenza tipica : 30 m Ω  
 Corsa di lavoro raccomandata: 1,78

**Technical Data**

Recommended Minimum Centers: 1,91 mm  
 Current Rating: 3,0 A  
 Typical Contact Resistance: 30 m Ω  
 Recommended Working Travel : 1,78

**Materiali**

Corpo : Ottone dorato  
 Molla : Acciaio argentata / dorata  
 Pistone : Rame-Berillio, nichel-oro / oro duro

**Materials**


Barrel : Gold plated  
 Spring : Music Wire, silver / gold plated  
 Plunger : Becu, hardened 24 Kt gold plated

**Informazioni per l'ordine - Order Info:**

Serie	Materiale Material	Testa Head	Ø	Forza Molla Spring Force	Galvanica Galvanic
SP-1	B=Becu S=Steel SS=Stainless St.				G = gold N = nickel R = roodium

**R-1**

**Ricettacolo - Receptacle**

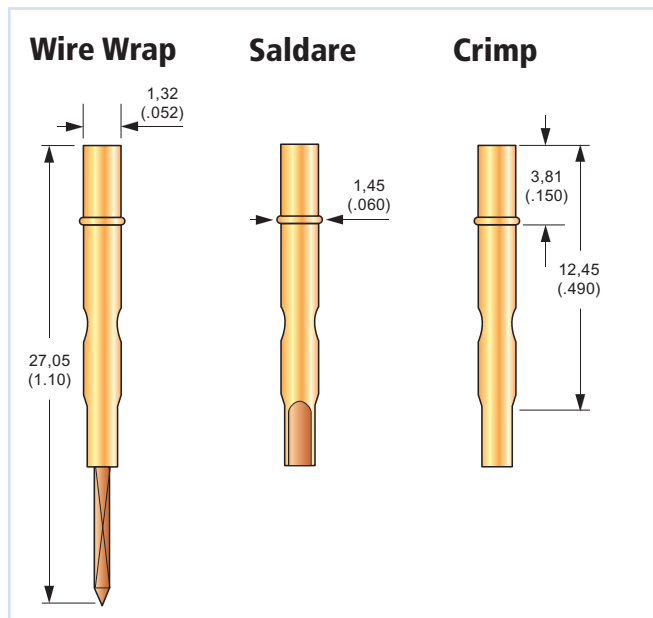

Corsa Max : 1,78 mm.  
 Max Travel :  
 Forza Molla : 108 gr.  
 Spring Force :  
 Precarico : 32 gr.  
 Preload :

**Punta di foratura:  
Drills:**

Ø 1,35



R-1	
-----	--

C = Crimp  
 S = Saldare  
 W = Wire wrap  
 WW = With wire