


| MATERIAL | TESTA HEAD | Ø mm         |
|----------|------------|--------------|
| B        | 1          | 0,75<br>1,40 |
| B<br>S   | 2          | 0,75         |
| B        | 4          | 0,75<br>1,22 |
| B<br>S   | 5          | 0,75<br>1,22 |
| B<br>S   | 8          | 0,75<br>1,22 |
| B<br>S   | 11         | 1,22         |
| S        | 12         | 0,75         |
| B<br>S   | 13         | 0,75         |
| S        | 14         | 0,75         |
| S        | 15         | 0,75         |
| B<br>S   | 21         | 1,22         |
| B<br>S   | 22         | 1,22         |
| B<br>S   | 25         | 1,22         |
| B<br>S   | 27         | 0,53         |
| B<br>S   | 30         | 0,75         |

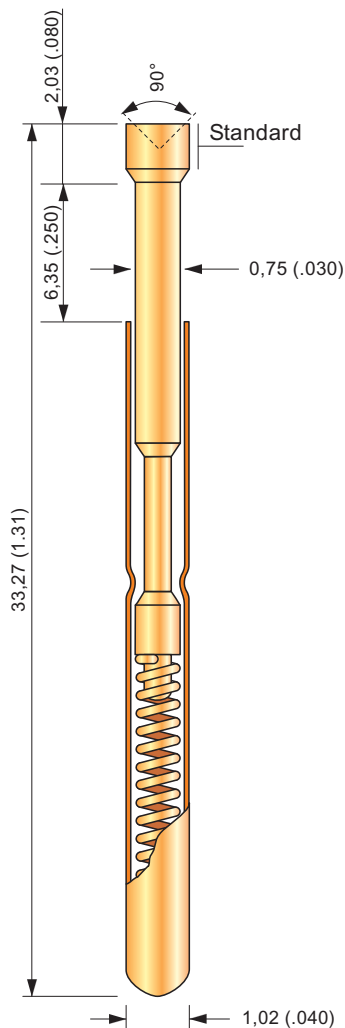

### Dati Tecnici

Distanza minima raccomandata : 1,91 mm  
 Intensità nominale : 3,0 A  
 Resistenza tipica : 20 m Ω  
 Corsa di lavoro raccomandata: 4,25

### Technical Data

Recommended Minimum Centers: 1,91 mm  
 Current Rating: 3,0 A  
 Typical Contact Resistance: 20 m Ω  
 Recommended Working Travel : 4,25

### Materiali

Corpo : Ottone dorato  
 Molla : Acciaio argentata / dorata  
 Pistone : Rame-Berillio, nichel-oro / oro duro

### Materials


Barrel : Gold plated  
 Spring : Music Wire, silver / gold plated  
 Plunger : Becu, hardened 24 Kt gold plated

### Informazioni per l'ordine - Order Info:

| Serie  | Materiale Material                    | Testa Head | Ø | Forza Molla Spring Force | Galvanica Galvanic |
|--------|---------------------------------------|------------|---|--------------------------|--------------------|
| SP-1-L | B=Becu<br>S=Steel<br>SS=Stainless St. |            |   |                          |                    |

### R-1-L

### Ricettacolo - Receptacle

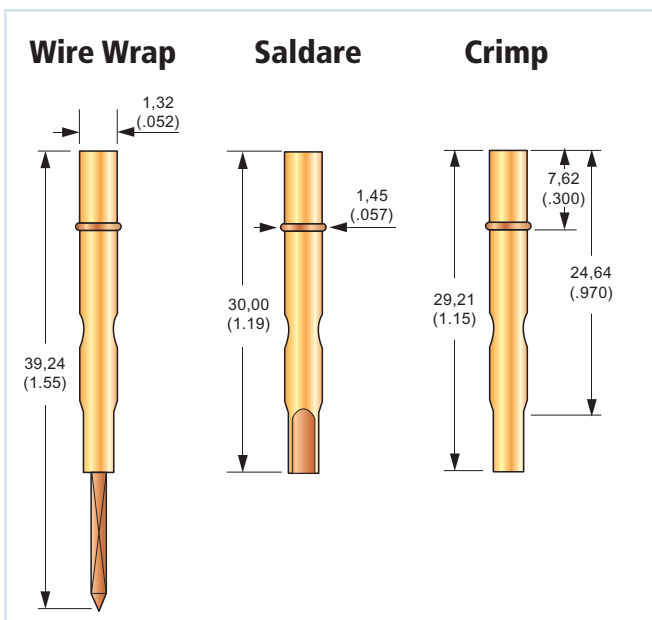

Corsa Max : 6,35 mm.  
 Max Travel :

Forza Molla : 108 gr.  
 Spring Force :

Precarico : 14 gr.  
 Preload :

Opzioni - Options :  
 150 g.  
 200 g.

### Punta di foratura: Drills:

Ø 1,38



|       |  |
|-------|--|
| R-1-L |  |
|-------|--|

C = Crimp  
 S = Saldare  
 W = Wire wrap  
 WW = With wire