


MATERIAL	TESTA HEAD	Ø mm
B	1	1,02 1,52
B S	2	1,02
B	3	1,02 1,52
B	4	1,02 1,27 1,52
B S	5	1,02 1,52
B S	7	0,60
B S	8	1,02 1,52
S	9	0,60 0,75 1,02
B	10	1,52
B S	11	1,52
B S	13	1,52
S	14	1,02 1,52
B S	21	1,02 1,27 1,52
B S	23	1,02
B S	24	1,52
B S	25	1,40

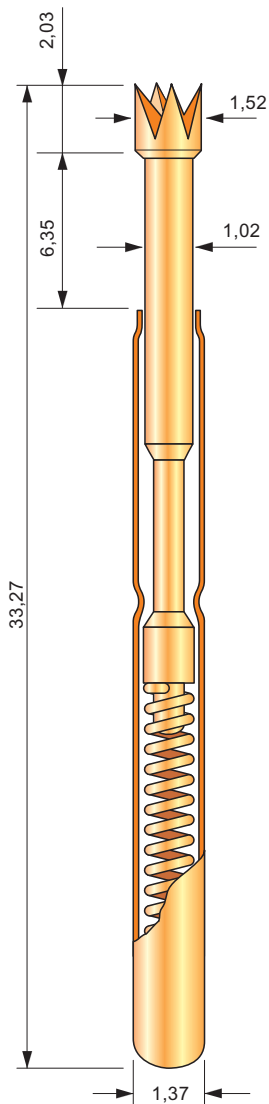

Dati Tecnici

Distanza minima raccomandata : 2,54 mm
 Intensità nominale : 2,0 - 3,0 A
 Resistenza tipica : 14 m Ω
 Corsa di lavoro raccomandata: 4,32

Technical Data

Recommended Minimum Centers: 2,54 mm
 Current Rating: 2,0 - 3,0 A
 Typical Contact Resistance: 14 m Ω
 Recommended Working Travel : 4,32

Materiali

Corpo : Ottone dorato
 Molla : Acciaio argentata / dorata
 Pistone : Rame-Berillio, nichel-oro / oro duro
 Acciaio temprato dorato

Materials


Barrel : Gold plated
 Spring : Music Wire, silver / gold plated
 Plunger : Becu, hardened 24 Kt gold plated
 HSS Hardened steel gold plated over nickel

Informazioni per l'ordine - Order Info:

Serie	Materiale Material	Testa Head	Ø	Forza Molla Spring Force	Galvanica Galvanic
SP-25	B=Becu S=Steel SS=Stainless St.				

R-25

Ricettacolo - Receptacle

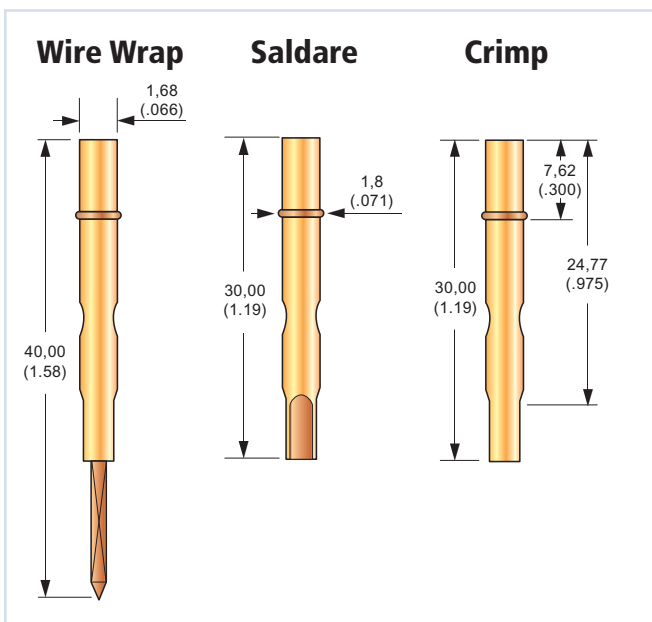

Corsa Max : 6,35 mm.
 Max Travel :

Forza Molla : 200 gr.
 Spring Force :

Precarico : 57 gr.
 Preload :

Opzioni - Options :
 100 g.
 150 g.
 300 g.

Punta di foratura: Drills:

Ø 1,72



R-25	
------	--

C = Crimp
 S = Saldare
 W = Wire wrap
 WW = With wire