


MATERIAL	TESTA HEAD	Ø mm
B	1	1,02 1,52
B S	2	0,75
B	3	1,02 1,52
B	4	1,02 1,27 1,52
B S	5	1,02 1,52
B S	7	0,60
B S	8	1,02 1,52
S	9	0,60 0,75 1,02
B	10	1,52
B S	11	1,52
B S	13	1,52
S	14	0,74 1,02 1,52
B S	21	1,02 1,27 1,52
B S	23	1,02
B S	25	1,40

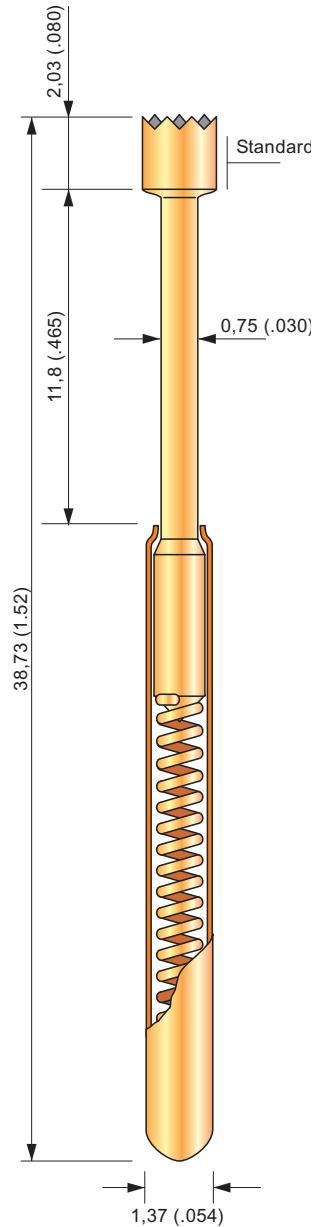

**Dati Tecnici**

Distanza minima raccomandata : 2,54 mm  
 Intensità nominale : 2,0 - 3,0 A  
 Resistenza tipica : 14 m Ω  
 Corsa di lavoro raccomandata: 8,00

**Technical Data**

Recommended Minimum Centers: 2,54 mm  
 Current Rating: 2,0 - 3,0 A  
 Typical Contact Resistance: 14 m Ω  
 Recommended Working Travel : 8,00

**Materiali**

Corpo : Ottone dorato  
 Molla : Acciaio argentata / dorata  
 Pistone : Rame-Berillio, nichel-oro / oro duro

**Materials**


Barrel : Gold plated  
 Spring : Music Wire, silver / gold plated  
 Plunger : Becu, hardened 24 Kt gold plated

**Informazioni per l'ordine - Order Info:**

Serie	Materiale Material	Testa Head	Ø	Forza Molla Spring Force	Galvanica Galvanic
B=Becu S=Steel SS=Stainless St.					
SP-25-L					

**R-25**

**Ricettacolo - Receptacle**

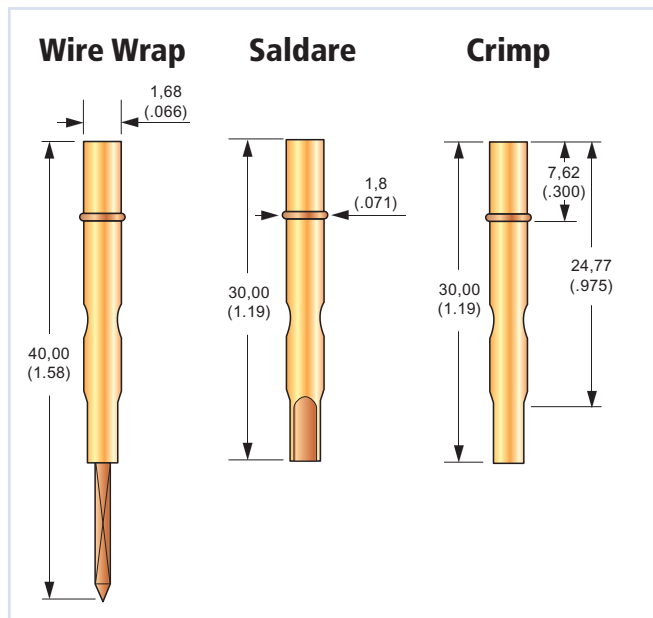

Corsa Max : 11,80 mm.  
 Max Travel :

Forza Molla : 200 gr.  
 Spring Force :

Prearico : 57 gr.  
 Preload :

Opzioni - Options :  
 100 g.  
 150 g.  
 250 G.  
 300 g.

**Punta di foratura:  
 Drills:**

Ø 1,72



R-25-L	
--------	--

C = Crimp  
 S = Saldare  
 W = Wire wrap  
 WW = With wire