


MATERIAL	TESTA HEAD	Ø mm
B	1	1,65 2,54
B S	2	1,65
B	3	1,65 2,54
B	4	2,03 2,54
B S	5	2,54
B	7	1,00
B S	8	2,54
B	10	2,54 4,00
B S	11	2,54
S	12	1,65
S	14	1,65
S	17	2,54
B S	20	2,54
B S	21	2,54
B S	26	2,54
B	30	1,00

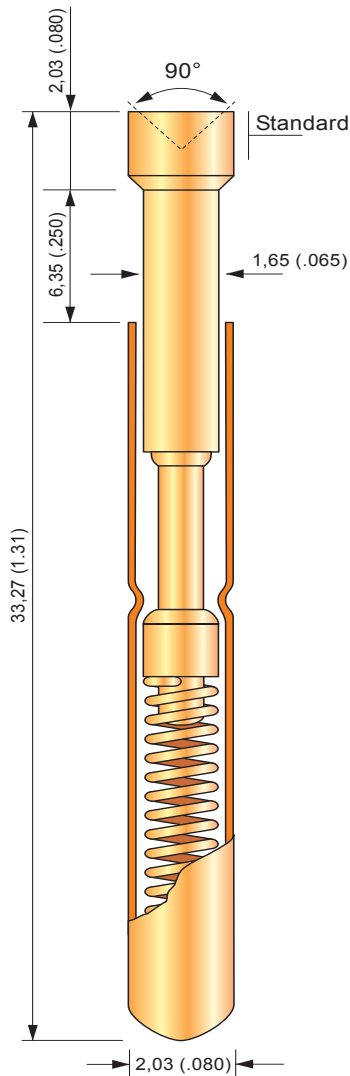

Dati Tecnici

Distanza minima raccomandata : 3,18 mm
 Intensità nominale : 5,0 A
 Resistenza tipica : 50 m Ω
 Corsa di lavoro raccomandata: 4,32

Technical Data

Recommended Minimum Centers: 3,18 mm
 Current Rating: 5,0 A
 Typical Contact Resistance: 50 m Ω
 Recommended Working Travel : 4,32

Materiali

Corpo : Ottone dorato
 Molla : Acciaio argentata / dorata
 Pistone : Rame-Berillio, nichel-oro / oro duro

Materials


Barrel : Gold plated
 Spring : Music Wire, silver / gold plated
 Plunger : Becu, hardened 24 Kt gold plated

Informazioni per l'ordine - Order Info:

Serie	Materiale Material	Testa Head	Ø	Forza Molla Spring Force	Galvanica Galvanic
SP-3	B=Becu S=Steel SS=Stainless St.				G=gold N=nickel R=rodium

R-3

Ricettacolo - Receptacle

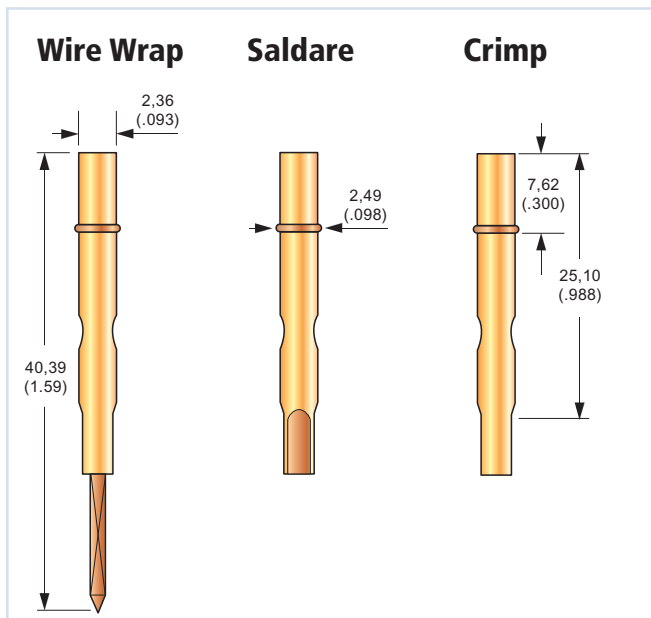

Corsa Max : 6,35 mm.
 Max Travel :

Forza Molla : 114 gr.
 Spring Force :

Precarico : 60 gr.
 Preload :

Opzioni - Options :
 200 G.
 300 g.

**Punta di foratura:
 Drills:**

Ø 2,40



R-3	
-----	--

C = Crimp
 S = Saldare
 W = Wire wrap
 WW = With wire