


SP-3HC/SP-4HC/SP-5HC

100 Mils
HIGH CURRENT PROBE

SP-3HC
5-15* AMP

SP-4HC
10-15* AMP

SP-5HC
15-30* AMP

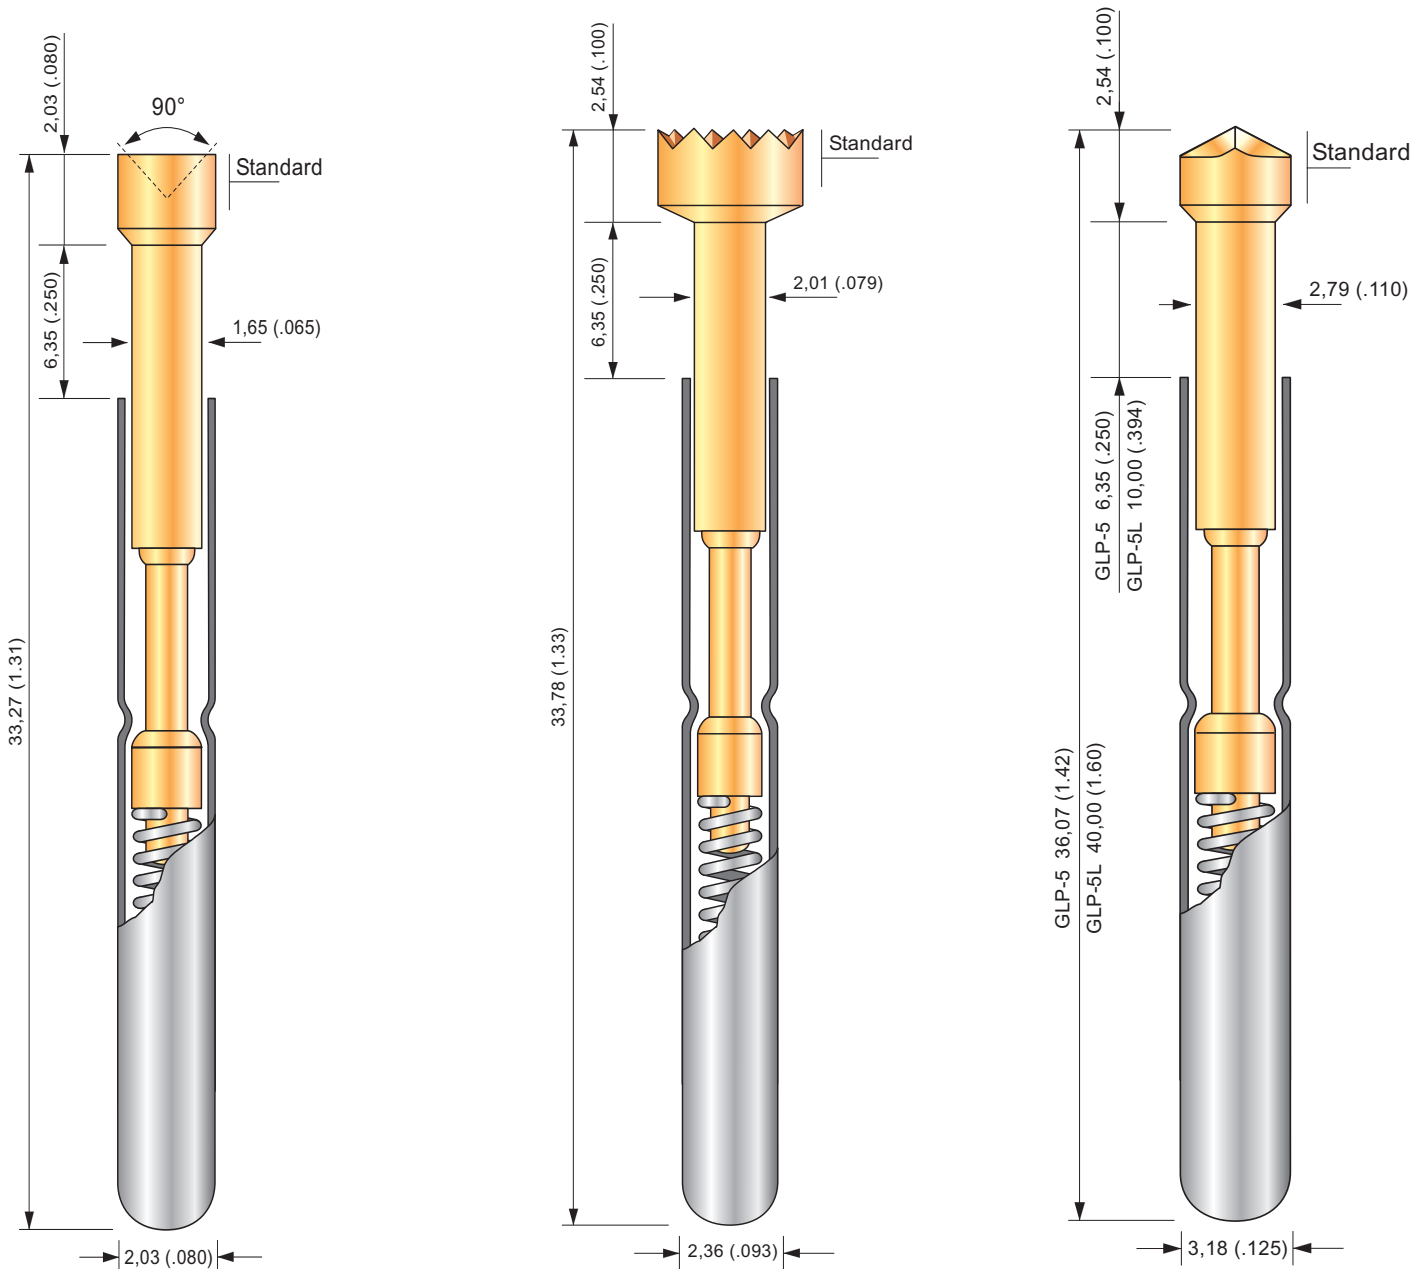

Dati Tecnici

Distanza minima raccomandata : 2,54 mm
 Intensità nominale : 2,0 - 3,0 A
 Resistenza tipica : 14 m Ω
 Corsa di lavoro raccomandata: 8,00

Technical Data

Recommended Minimum Centers: 2,54 mm
 Current Rating: 2,0 - 3,0 A
 Typical Contact Resistance: 14 m Ω
 Recommended Working Travel : 8,00

Materiali

Corpo e molla: Acciaio argentato
 Pistone : Rame-Berillio, nichel-oro / oro duro

Materials

Barrel & spring : Deep silver plated
 Plunger : Becu, hardened 24 Kt gold plated

Per teste e ricettacoli vedere: SP-3, SP-4, SP-5
 For head and receptacles see: SP-3, SP-4, SP-5

* HC probes are special **deep silver plated** for highest conductivity performance. Max Current is NOT continue