


MATERIAL	TESTA HEAD	Ø mm
B	38	0,65 0,80 1,00 2,50

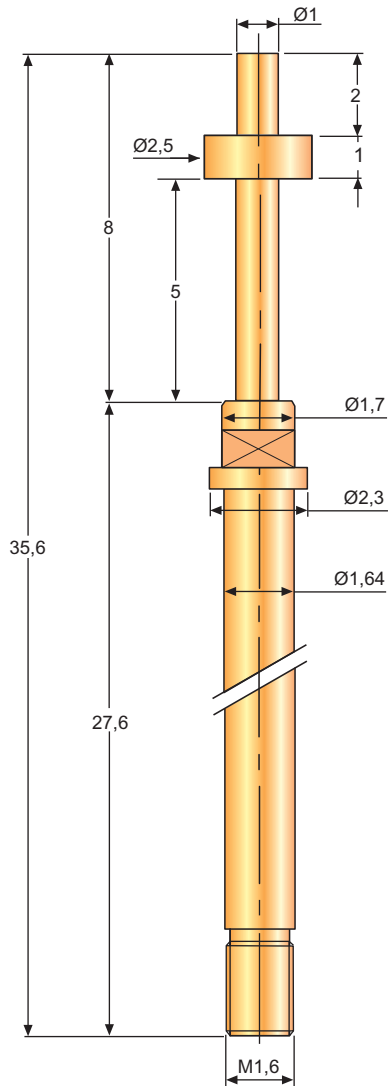

### Dati Tecnici

Distanza minima raccomandata : 2,54 mm  
 Intensità nominale : 5,0 - 8,0 A  
 Resistenza tipica : 20 m Ω  
 Corsa di lavoro raccomandata: 4,00

### Technical Data

Recommended Minimum Centers: 2,54 mm  
 Current Rating: 5,0 - 8,0 A  
 Typical Contact Resistance: 20 m Ω  
 Recommended Working Travel : 4,00

### Materiali

Corpo : Ottone dorato  
 Molla : Acciaio argentata / dorata  
 Pistone : Rame-Berillio, nichel-oro / oro duro

### Materials


Barrel : Gold plated  
 Spring : Music Wire, silver / gold plated  
 Plunger : Becu, hardened 24 Kt gold plated

### Informazioni per l'ordine - Order Info:

Serie	Materiale Material	Testa Head	Ø	Forza Molla Spring Force	Galvanica Galvanic
SP-32M	B=Becu S=Steel SS=Stainless St.				

### R-32M

### Ricettacolo - Receptacle

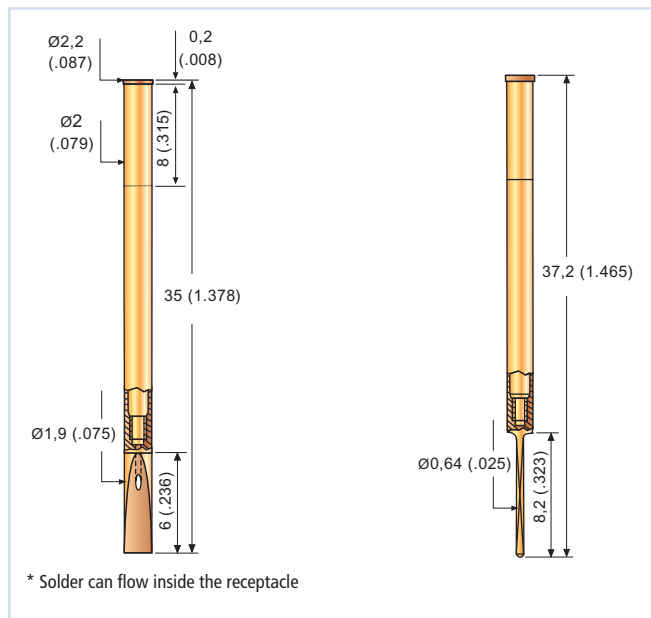

\* Solder can flow inside the receptacle

Corsa Max : 5,0 mm.  
 Max Travel :

Forza Molla : 200 gr.  
 Spring Force :

Prearico : 75 gr.  
 Preload :

Opzioni - Options :

### Punta di foratura: Drills:

Ø	
R-32M	

C = Crimp  
 S = Saldare  
 W = Wire wrap  
 WW = With wire