







MATERIAL	TESTA HEAD	Ø mm
B	1 	2,30
B S	2 	1,80
B	3 	0,80 1,00 2,50
B	4 	3,00
B S	8 	3,00



Dati Tecnici

Distanza minima raccomandata : 4,75 mm
 Intensità nominale : 5,0 - 8,0 A
 Resistenza tipica : 30 m Ω
 Corsa di lavoro raccomandata: 4,0

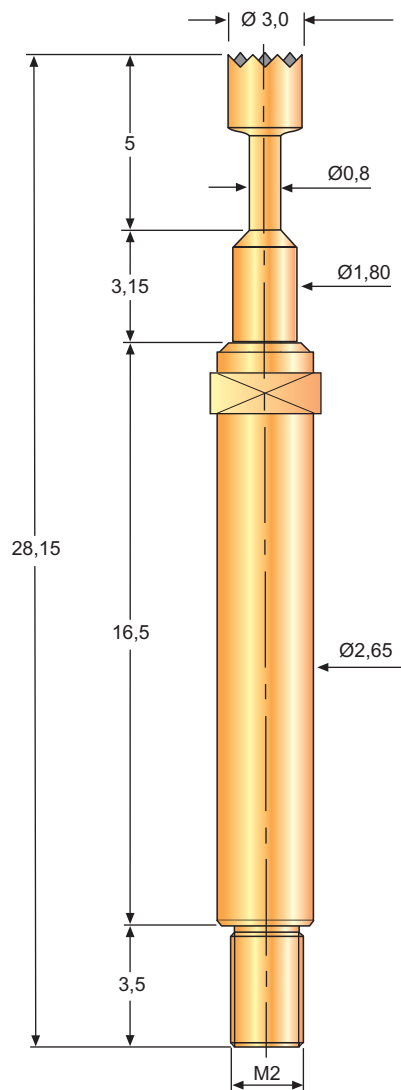Technical Data

Recommended Minimum Centers: 2,54 mm
 Current Rating: 5,0 - 8,0 A
 Typical Contact Resistance: 30 m Ω
 Recommended Working Travel : 4,0

Materiali

Corpo : Ottone dorato
 Molla : Acciaio argentata / dorata
 Pistone : Rame-Berillio, nichel-oro / oro duro

Materials


Barrel : Gold plated
 Spring : Music Wire, silver / gold plated
 Plunger : Becu, hardened 24 Kt gold plated

Informazioni per l'ordine - Order Info:

Serie	Materiale Material	Testa Head	Ø	Forza Molla Spring Force	Galvanica Galvanic
SP-33M	B=Becu S=Steel SS=Stainless St.				G = gold N = nickel R = rodium

R-33M

Ricettacolo - Receptacle

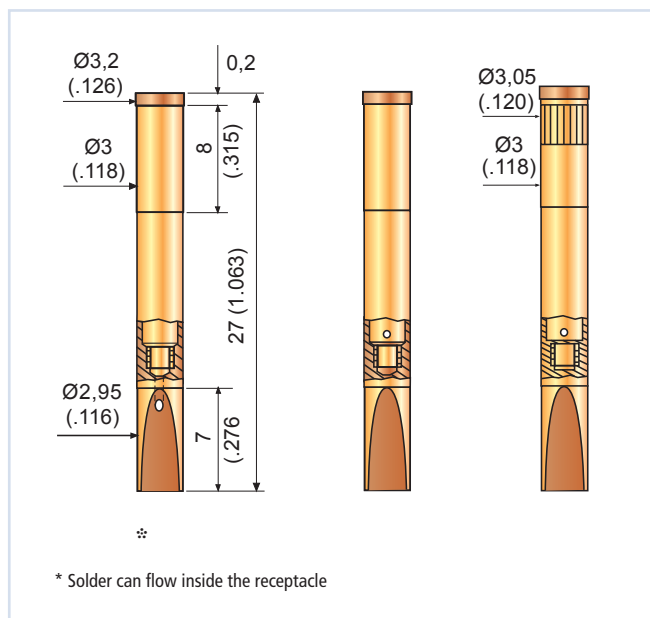

Corsa Max : 5,3 mm.
 Max Travel :

Forza Molla : 300 gr.
 Spring Force :

Precarico : ?? gr.
 Preload :

Opzioni - Options :
 1??? g.

Punta di foratura: Drills:

Ø



R-33M	
-------	--

C = Crimp
 S = Saldare
 W = Wire wrap
 WW = With wire